

# UN-NVR30208/16EP8 / UN-NVR30216EP16


## H.265 8/16CH 2-SATA NVR



### Main Feature:

- 8/16-channel input
- Third-party IP cameras supported with ONVIF conformance
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- Up to 12 Megapixels resolution recording
- Support H.265/H.264 video formats
- Accurate retrieval, instant playback
- Up to 8TB for each disk
- Support various VCA detection alarm and VCA search
- Plug & Play with up to 8/16 independent PoE network interfaces
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access

### Physical Interfaces:

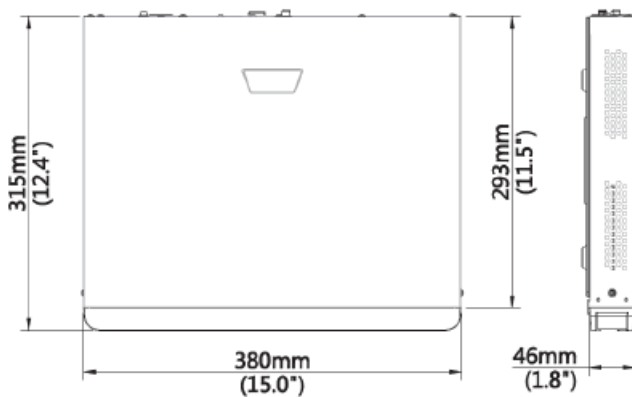

### Specification:

Model	UN-NVR30208EP8	UN-NVR30216EP8	UN-NVR30216EP16
<b>Video/Audio Input</b>			
IP Video Input	8CH	16CH	
Two-way Audio Input	1CH, RCA		
<b>Network</b>			
Incoming Bandwidth	80Mbps	160Mbps	
Outgoing Bandwidth	160Mbps	320Mbps	
Remote Users	128		
<b>Video/Audio Output</b>			
HDMI / VGA Output	VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz HDMI: 4K (3840x2160) / 60Hz, 4K (3840x2160) / 30Hz, 1920x1080p / 60Hz, 1920x1080p / 50Hz, 1600x1200 / 60Hz, 1280x1024 / 60Hz, 1280x720 / 60Hz, 1024x768 / 60Hz		
Recording Resolution	12MP / 8MP / 6MP / 5MP / 4MP / 3MP / 1080p / 960p / 720p / D1 / 2CIF / CIF		
Audio Output	1CH, RCA		
Playback	8CH	16CH	
<b>Decoding</b>			
Compression	H.265/H.264		
Live view / Playback	12MP / 8MP / 6MP / 5MP / 4MP / 3MP / 1080p / 960p / 720p / D1 / 2CIF / CIF		
Capability	4 x 12MP@20, 4 x 4K@30, 8 x 4MP@30, 16 x 1080P@30		
<b>Hard Disk</b>			
SATA	2 SATA interfaces (up to 8TB for each disk)		
<b>External Interface</b>			
Network Interface	1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface		
USB Interface	Front panel: 1 x USB2.0 · Rear panel: 1 x USB3.0		
Alarm In / Out	4 / 1CH		
<b>Special Features</b>			
Video Analysis Functions	support face detection, intrusion detection, cross line detection, people counting, scene change detection, defocus Detection, audio Detection, auto tracking		
Trigger action	When VCA alarm happened, can set the trigger action as send email, upload to FTP and so on.		
Smart Search	instruction, face detection, line crossing, etc.		
Corridor Mode	Display and playback		
Smart updates	Cloud update. IP cameras updates can be done through local NVRs		
<b>PoE</b>			
Interface	8CH 100 Mbps PoE network interfaces	16CH 100 Mbps PoE network interfaces	
Max Power	Max 30W for single port	Max 30W for single port	
	Max 130W in total ( 16.25W for each )	Max 240W in total ( 15W for each )	
Supported Standard	IEEE 802.3af/at		
<b>General</b>			
Power Supply	100 ~ 240 VAC		
Consumption	≤ 20 W ( without HDD )		
Temperature	-10°C ~ +55°C ( +14°F ~ +131°F )		
Working Humidity	10% ~ 90%		
Dimensions	380 mm × 315mm × 46 mm		
Weight	≤2.42kg (5.34lb) ( without HDD )	≤2.48kg(5.47lb) ( without HDD )	

Design and specifications are subject to change without notice.

www.EasternCCTV.com

#### Headquarters

50 Commercial St.,  
Plainview, NY 11803

TEL: 516-870-3779 FAX: 516-390-1200

#### Queens, NY

129-04 14th Ave.,  
College Point, NY 11356

TEL: 718-939-2710 FAX: 718-939-2713

#### E. Los Angeles, CA

110 California Ave.,  
City of Industry, CA 91744

TEL: 626-961-8810 FAX: 626-961-8809

#### N. Hollywood, CA

13761 Saticoy St.  
Panorama City, CA 91402

TEL: 818-924-9021 FAX: 818-849-5127

#### Miami, FL

4515 NW 72nd Ave.  
Miami, FL 33166

TEL: 305-423-1329 FAX: 786-717-7282

#### Houston, TX

3790 Westchase Dr.,  
Houston, TX 77042

TEL: 832-308-5282 FAX: 832-925-7454